

Micro SM20 with FT100D


BE ATTENTION : with this connections, UP and DOWN keys don't work.

Icom SM20 microphone wiring

Icom SM-20 desktop microphone wiring

1.	microphone output	white
2.	+8 VDC input	red
3.	frequency up/down	blue
4.	no connection	
5.	PTT	yellow
6.	GND (PTT ground)	black
7.	GND (mic ground)	shield
8.	No connection	

FT100D Yaesu transceiver microphone wiring

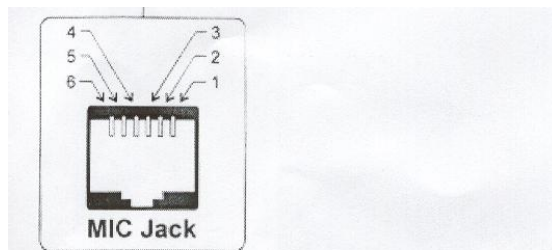

Mic-jack Yaesu FT-100 / 90 / 8100.

- Pin 1:** SW 2 multi-function switching
- Pin 2:** N.C. (9600bps packet data output FT-90)
- Pin 3:** + 9 v
- Pin 4:** GND
- Pin 5:** Microphone Input
- Pin 6:** SW 1 PTT, UP och DOWN

Connections FT100D - SM20

